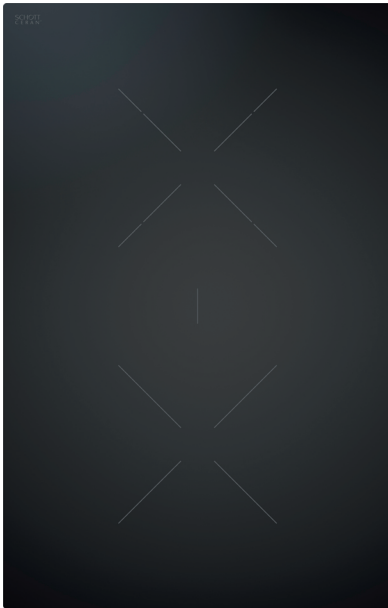


EN CKCB product information sheet**CKCB**

Classic HiLight cooktop, 1-ring/2-ring/roaster

General product information:

Product:	Radiant cooktop for the modular cooktop extractor system BORA Classic 2.0
Product highlights:	Intuitive touch controls on the cooktop extractor operating panel, fully flush-mounted cooktop and extractor, ring switching (2-ring/roaster switching)
Safety and warning information:	See operating and installation instructions

CKCB

Classic HiLight cooktop, 1-ring/2-ring/roaster

Technical data

Supply voltage	220-240 V
Frequency	50-60 Hz
Maximum power consumption	3680 W
Maximum power rating	3680 W
Fuse protection	1 × 16 A
Mains supply cable length	1.5 m
Dimensions (width × depth × height)	327 × 515 × 75 mm
Weight (incl. accessories/packaging)	7.4 kg
Surface material	Glass ceramic
Cooktop power levels	1-9, 2-ring/roaster additional switching
Heating rings on front cooking zone	1
Heating rings on rear cooking zone	2
Size of front cooking zone	Ø 180 mm
Size of rear cooking zone	Ø 120/180 mm
Size of roaster cooking zone	Ø 180 × 410 mm
Front cooking zone output	1600 W
Rear cooking zone output	600/1600 W
Cooking zone output when bridged	3680 W

Product description

- Compact size
- Minimalist design
- 2-ring additional switching
- Oversized roaster cooktop
- Demo mode

Functions

- Cooking zone timer
- Automatic heat-up function
- Heat retention function
- Bridging function
- Pause function
- Cleaning lock

Safety features

Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery

HiLight cooktop CKCB, mains supply cable, installation accessories

Product and planning information

Sufficient ventilation below the cooktop must be ensured.

