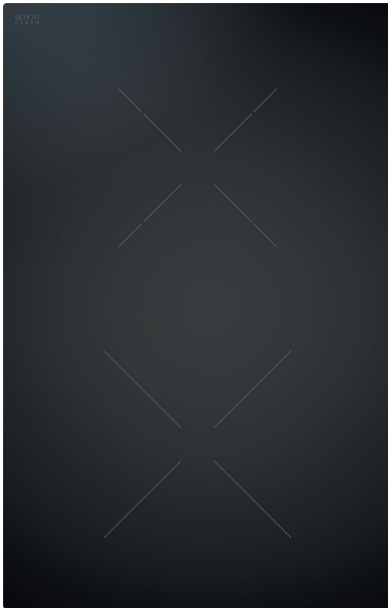


EN CKCH product information sheet**CKCH**

Classic Hyper cooktop, 1-ring/2-ring

General product information:

Product:	Radiant cooktop for the modular cooktop extractor system BORA Classic 2.0
Product highlights:	Intuitive touch controls on the cooktop extractor operating panel, fully flush-mounted cooktop and extractor, 2-ring switching
Safety and warning information:	See operating and installation instructions

CKCH

Classic Hyper cooktop, 1-ring/2-ring

Technical data

Supply voltage	220-240 V
Frequency	50-60 Hz
Maximum power consumption	3680 W
Maximum power rating	3680 W
Fuse protection	1 × 16 A
Mains supply cable length	1.5 m
Dimensions (width × depth × height)	327 × 515 × 75 mm
Weight (incl. accessories/packaging)	7.2 kg
Surface material	Glass ceramic
Cooktop power levels	1-9, Hyper setting, 2-ring additional switching
Heating rings on front cooking zone	1
Heating rings on rear cooking zone	2
Size of front cooking zone	Ø 215 mm
Size of rear cooking zone	Ø 120/180 mm
Front cooking zone output	2100 W
Rear cooking zone output	600/1600 W
Front cooking zone output on power setting	3000 W (Hyper setting)
Rear cooking zone output on power setting	2200 W

Product description

- Compact size
- Minimalist design
- 2-ring additional switching
- Demo mode

Functions

- Power setting
- Cooking zone timer
- Automatic heat-up function
- Heat retention function
- Pause function
- Cleaning lock

Safety features

Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery

Hyper cooktop CKCH, mains supply cable, installation accessories

Product and planning information

- Sufficient ventilation below the cooktop must be ensured.

