


EN PURU product information sheet

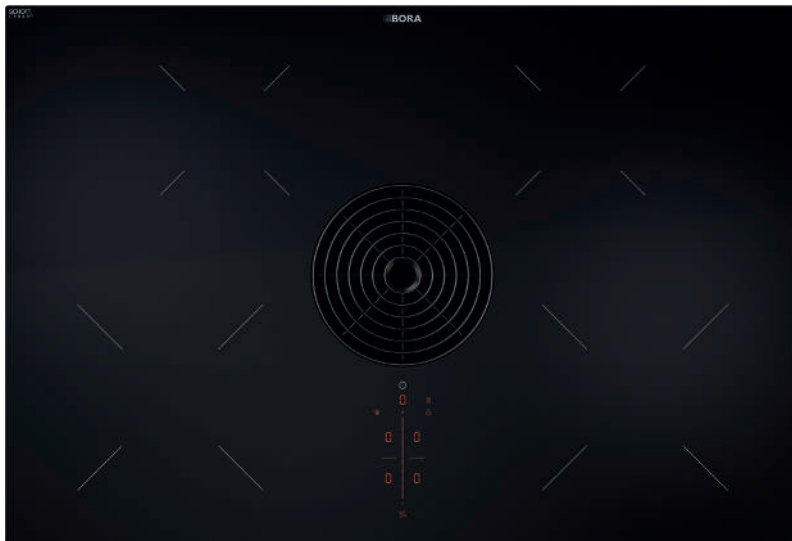

PURU

Pure induction cooktop with integrated cooktop extractor – recirculation

General product information:

Product:	Compact cooktop extractor system – a combined cooktop and extractor system
Product highlights:	Effective cooktop extractor including stainless steel grease filter, cooktop with 4 induction cooking zones, intuitive touch controls, coloured air inlet nozzles as accessories, filter change from above through the air inlet opening
Model:	Recirculation system with integrated odour filter
Minimum installation dimensions:	Kitchen unit with a min. width of 80 cm
Safety and warning information:	See operating and installation instructions

PISPUEN-10001

PURU

Pure induction cooktop with integrated cooktop extractor – recirculation

Technical data

Multiphase supply voltage	380–415 V 2N/3N
Supply voltage 1-phase	220–240 V
Frequency	50–60 Hz
Maximum power consumption	7600 W (4400 W/3600 W)
3-phase fuse protection/power supply	3 × 16 A
2-phase fuse protection/power supply	2 × 16 A
1-phase fuse protection/power supply	1 × 32 A (1 × 20 A / 1 × 16 A)
Dimensions (width × depth × height)	760 × 515 × 199 mm
Weight (incl. accessories/packaging)	23.2 kg
Surface material	Glass ceramic
Cooktop extractor / cooktop power levels	1–9, P
Size of front cooking zones	Ø 210 mm
Size of rear cooking zones	Ø 175 mm
Front cooking zone output	2300 W
Rear cooking zone output	1400 W
Output of front cooking zones on power setting	3000 W
Output of rear cooking zones on power setting	2100 W
Filter material	Activated charcoal with ion exchanger
Maximum filter service life	150 hrs (1 year)
Duct connection	BORA Ecotube

Product description

- Intuitive, red sControl operating panel
- Compact size
- Stainless steel grease filter
- Integrated drip tray
- Activated charcoal filter for effective odour elimination
- eSwap – easy filter changes

Functions

- Power setting
- Automatic extractor function
- Automatic after-run
- Filter status and the filter service display
- Pan size recognition
- Automatic heat-up function
- Heat retention function
- Cooking zone timer
- Pause function
- Short-time timer
- Super simple mode

Safety features

Child lock, control lock, cleaning lock, residual heat indicator, safety shut-down, overheating protection

Scope of delivery

Induction cooktop with integrated cooktop extractor – recirculation PURU, black air inlet nozzle, stainless steel grease filter, activated charcoal filter, operating and installation instructions, installation template, installation accessories

Accessories

Activated charcoal filter PUAKE, air purification box with telescopic pull-out PULBTA, stainless steel grease filter PUEF, coloured air inlet nozzles (black PUED, greige PUEDG, red PUEDR, jade green PUEDJ, orange PUEDO, blue PUEDB, light grey PUEDL, sunshine yellow PUEDS), sealing tape UDB25, cooktop frame KFR760AB, side frame USL515/USL515AB

Product and planning information

- The mains supply cable is to be provided on site
- Front power socket
- Flush installation or surface mounting possible
- Sufficient ventilation below the cooktop must be ensured
- The drawers/ shelves in the base unit must be removable (for maintenance/cleaning)
- Air purification box fitted with a telescopic pull-out (up to 80 mm) for connection to the back of the kitchen unit
- Telescopic pull-out can be extended by 105 mm through the use of an additional telescopic pull-out PULBTA (available as an accessory)
- Suitable for use with all BORA sockets

