


EN LSASW / LSAMG / LSARG product information sheet

Colours

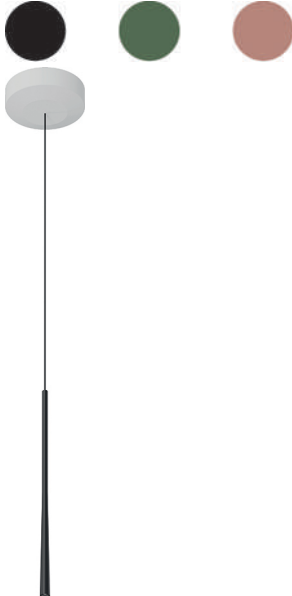

LSASW / LSAMG / LSARG

Stars pendant light surface-mounted – black | moss green | rose gold

General product information:

Product:	Surface-mounted pendant light
Product highlights:	Available in three different colours, height-adjustable without tools
Safety and warning information:	See operating and installation instructions
Energy efficiency class:	

LSASW / LSAMG / LSARG

Stars pendant light surface-mounted – black | moss green | rose gold

Technical data

Supply voltage	220-240 V
Frequency	50-60 Hz
Maximum power consumption	4.6 W
Connection clamp	3-pin
Power consumption in standby mode	< 0.5 W
Ceiling housing dimensions (D × H)	124 × 42 mm
Light dimensions (D × H)	14 × 330 mm
Weight (incl. accessories/packaging)	1.3 kg
Surface material	Metal/plastic
Lighting control system	Button / DALI
Dimmable	no
Light bulb / light colour	LED / warm white
Colour temperature / colour rendering index (Ra)	2700 K / CRI > 90
Luminous flux	230 lm
Direct beam angle	46°
Service life	> 50,000 hrs
Switching cycles	Min. 50,000
Protection class protection type	1 IP 20
Energy efficiency class	G

Product description

- Individually height-adjustable without tools

Scope of delivery

Stars pendant light surface-mounted, operating and installation instructions, installation template

Product and planning information

- Installation aids must be provided at the installation site

