

EN CKA2FIT product information sheet




CKA2FIT

BORA Classic 2.0 surface induction Tepan set (1 × CKASE2, 1 × CKFI, 1 × CKT)

General product information:

Product:	set consisting of one Classic surface induction cooktop, one Classic Tepan stainless steel grill and one Classic cooktop extractor system including shallow silencer, plinth fan and corresponding BORA Ecotube products. Other components are available separately (e.g. odour filters, wall sleeves, etc.) for exhaust air and recirculation models.
Product highlights:	Cooktop with extra-large surface induction cooking zones, Tepan stainless steel grill with precise temperature indicator, central touch control panel for operating the system, intuitive multi-coloured sControl+ operating panel
Minimum installation dimensions: (1 extractor, 2 cooktops)	Kitchen unit with a min. width of 80 cm
Safety and warning information:	See operating and installation instructions
Energy efficiency class:	 (applies to the exhaust air model)

Components:

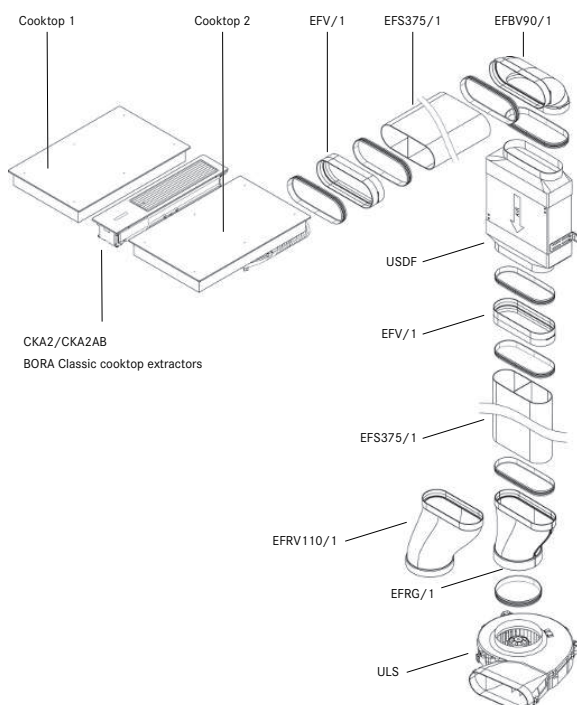

PIS-CKA2FITEN-10001

CKASE2 / CKASE2AB

Classic 2.0 cooktop extractor system set (...All Black)

Product description

- Intuitive multi-coloured sControl+ operating panel
- Direct function selection
- Minimum volume
- Integrated grease drip tray
- Stainless steel grease filter
- Compact size

Functions

- Automatic extractor function
- Automatic after-run
- Power setting
- Filter service life and filter service display (recirculation only)
- Operating lock
- Short-time timer

Safety features

Child lock, safety shut-down

Scope of delivery


- 1 Classic cooktop extractor CKA2/CKA2AB
- 1 shallow silencer USDF
- 1 plinth fan EC ULS
- 1 shallow vertical Ecotube with 90° bend EFBV90/1
- 1 shallow-to-round straight Ecotube transition piece EFRG/1
- 1 shallow-to-round Ecotube transition piece with offset 110 mm EFRV110/1
- 1 Ecotube shallow duct with partition 375 mm EFS375/1
- 2 Ecotube shallow duct connectors EFV/1
- 7 Ecotube flat seals EFD/1
- 1 Ecotube round seal ERD/1

Accessories

BORA Classic air inlet nozzle CKAED, BORA Classic air inlet nozzle All Black CKAEDAB, BORA Classic grease filter unit incl. grease filter tray CKAFFE, BORA Classic inlay frame CER, side frame USL515/USL515AB

Product and planning information

- Central components for the entire BORA Classic 2.0 system (neither the system nor individual components can be operated without a cooktop extractor)
- The cooktop extractor and cooktops are operated via the operating panel on the cooktop extractor
- Suitable for use with all BORA Classic 2.0 cooktops
- Up to 2 cooktops can be connected to each cooktop extractor
- Suitable for use as a recirculation or exhaust system
- Flush installation or surface mounting possible
- Airflow can be directed to the left or right of the extractor. The curved duct piece enables airflow to be channelled to the rear and the straight duct piece enables it to be channelled to the side.
- Suitable for use with all BORA universal fans (except duct fan ULI)
- Long or complex exhaust channels possible using an additional fan module
- The low installation height (100 mm) enables plinth fan ULI to be positioned in the plinth area
- Control unit can be compactly positioned in the plinth area
- The appliance and control unit are connected via a CAT 5 communication cable
- The drawers or shelves in the base unit must be removable (for maintenance and cleaning)
- Suitable for use with all BORA sockets
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant
- The depth of the duct connection (90° bend) can be reduced to 150 mm

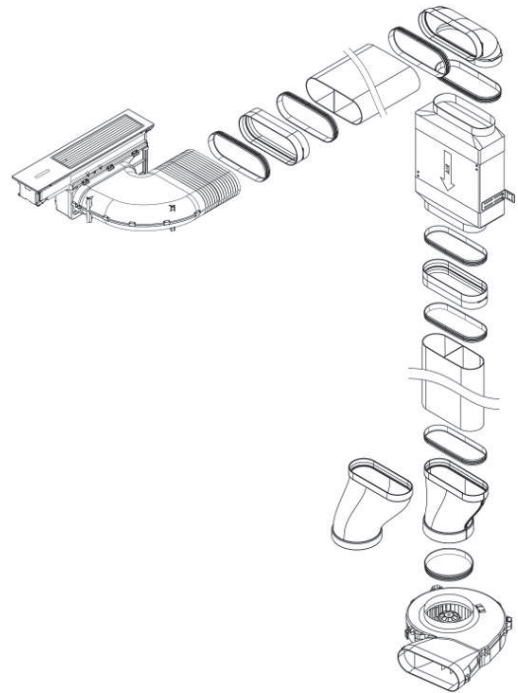

CKFI

Classic surface induction cooktop

Technical data

Supply voltage	220–240 V
Frequency	50–60 Hz
Maximum power consumption	3680 W
Maximum power rating	3680 W
Fuse protection	1 × 16 A
Dimensions (width × depth × height)	327 × 515 × 58 mm
Weight (incl. accessories / packaging)	7.9 kg
Surface material	Glass ceramic
Cooktop power levels	1–9, P
Size of front cooking zone	230 × 230 mm
Size of rear cooking zone	230 × 230 mm
Front cooking zone output	2100 W
Rear cooking zone output	2100 W
Front cooking zone output on power setting	3680 W
Rear cooking zone output on power setting	3680 W
Cooktop power supply cable	1.5 m

Product description

- Oversized surface induction cooking zones
- Compact size
- Minimalist design
- Demo mode

Functions

- Power setting
- Pan size recognition
- Cooking zone timer
- Automatic heat-up function
- Heat retention function
- Bridging function
- Pause function
- Cleaning lock

Safety features

Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery





Surface induction cooktop CKFI, mains supply cable, installation accessories

Accessories

Grill pan for surface induction KWGPFI

Product and planning information

- Can only be operated in conjunction with a cooktop extractor
- Sufficient ventilation below the cooktop must be ensured
- Induction cookware required
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant

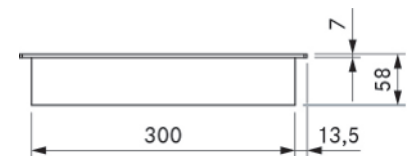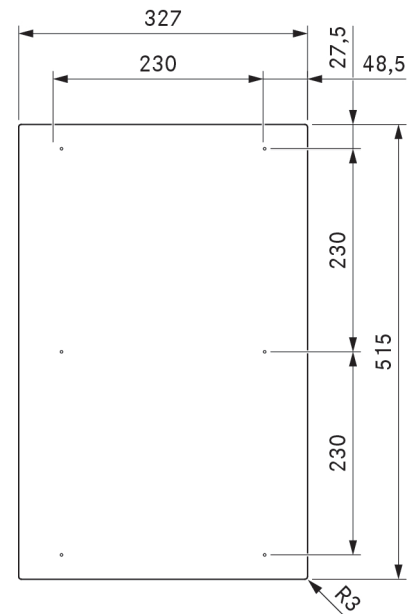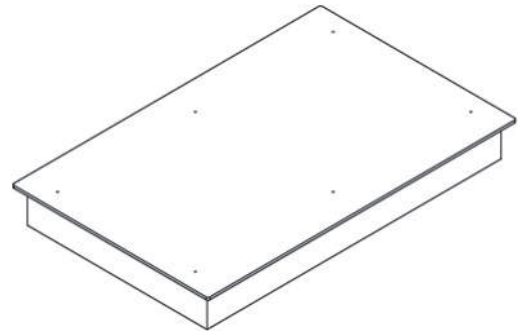

CKT

Classic Tepan stainless steel grill with 2 cooking zones

Technical data

Supply voltage	220-240 V
Frequency	50-60 Hz
Maximum power consumption	3500 W
Maximum power rating	3500 W
Fuse protection	1 × 16 A
Dimensions (width × depth × height)	327 × 515 × 73 mm
Weight (incl. accessories / packaging)	13.6 kg
Surface material	Brushed stainless steel
Temperature control range	150-230 °C, 250 °C (1-9, P)
Size of front cooking zone	250 × 220 mm
Size of rear cooking zone	250 × 220 mm
Size of bridged cooking zones	250 × 440 mm
Front cooking zone output	1750 W
Rear cooking zone output	1750 W
Cooking zone output when bridged	3500 W
Cooktop power supply cable	1.5 m

Product description

- Compact size
- Minimalist design
- Precise temperature control
- Precise temperature indicator
- Rapid heat-up
- Cleaning-optimised design
- Demo mode

Functions

- Power setting
- Cooking zone timer
- Heat retention function
- Bridging function
- Pause function
- Cleaning lock
- Cleaning function

Safety features

Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery

Tepan stainless steel grill CKT, Tepan spatula PTTS1, mains supply cable, installation accessories

Accessories

Tepan spatula KWTS

Product and planning information

- Can only be operated in conjunction with a cooktop extractor
- Sufficient ventilation below the cooktop must be ensured.
- Make sure that the worktop is heat-resistant (approx. 100 °C)
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant

