

EN PKAS3HL product information sheet




PKAS3HL

Pro HiLight set (1 × PKAS3, 1 × PKC3, 1 × PKCB3, 1 × EFBV90, 1 × EFS375, 1 × EFV)

General product information:

Product:	set consisting of one Pro HiLight cooktop 3-ring/2-ring, one Pro HiLight cooktop 3-ring/roaster, one Pro cooktop extractor system with integrated fan and corresponding BORA Ecotube products. Other components are available separately (e.g. odour filters, wall sleeves, etc.) for exhaust air and recirculation models.
Product highlights:	HiLight cooktops with high-gloss glass ceramic and 2-ring, 3-ring or roaster additional switching, intuitive control knob with analogue/digital operation (knob ring and touch surface), cooktop extractor with automatic cover flap to open and close the air inlet opening
Minimum installation dimensions: (1 extractor, 2 cooktops)	Kitchen unit with a min. width of 90 cm
Safety and warning information:	See operating and installation instructions
Energy efficiency class:	 (applies to the exhaust air model)

Components:

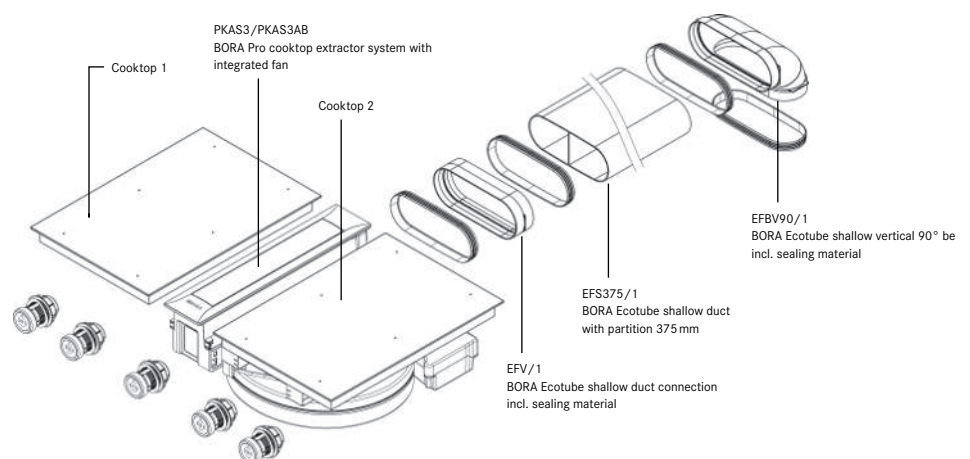

PKAS3/PKAS3AB

Pro cooktop extractor system with integrated fan (...All Black)

Technical data

Supply voltage	220-240 V
Frequency	50/60 Hz
Maximum power consumption	550 W
Dimensions (width × depth × height)	468 × 540 × 199 mm
Weight (incl. accessories / packaging)	12.5 kg
Surface material	Stainless steel 1.4016
Cooktop extractor power levels	1-9, P
Duct connection	BORA Ecotube
Control unit power supply cable	2 m
Control knob connection cable	0.25 m

Product description

- Modular system
- Integrated fan
- Intuitive control knob
- Automatic cover flap
- Integrated grease drip tray
- Stainless steel grease filter
- Central components for the entire system

Functions

- Automatic extractor function
- Automatic after-run
- Power setting
- Filter service life and filter service display (recirculation only)
- Cleaning function
- Short-time timer
- Super simple mode

Safety features

Child lock, safety shut-down, anti-trap protection

Scope of delivery





Pro cooktop extractor system with integrated fan PKAS3/PKAS3AB, control knob, cover flap, stainless steel grease filter, filter tray, maintenance tray, control knob connection cable, mains supply cable with type E + F plugs, operating and installation instructions, installation accessories

Accessories

Stainless steel grease filter PKA1FF, cover flap PKA1VK/PKA1VKAB, filter tray PKA1FW, mains supply cable type I UNLI (AUS) / type J UNLJ (CH) / type G UNLG (GB-IE) / type B UNLB (PH) / type H UNLH (IL)

Product and planning information

- Suitable for use as a recirculation or exhaust system
- Duct connection always on the back of the appliance on the right-hand side
- Suitable for use with all BORA Professional 3.0 cooktops
- Up to 2 cooktops can be connected to each cooktop extractor
- Long or complex exhaust channels possible using an additional fan module
- Customisable worktop height
- Worktop depth ≥ 700 mm
- Flush installation or surface mounting possible
- The drawers or shelves in the base unit must be removable (for maintenance and cleaning)
- Suitable for use with all BORA sockets
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant

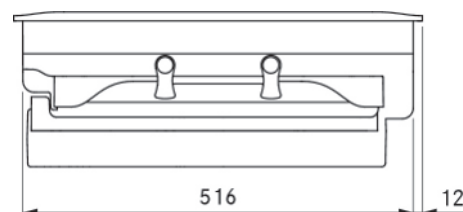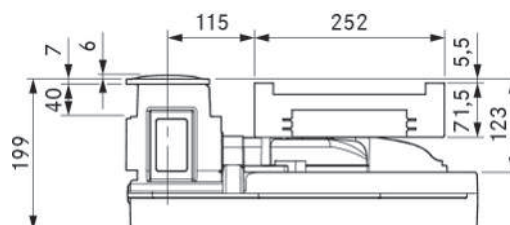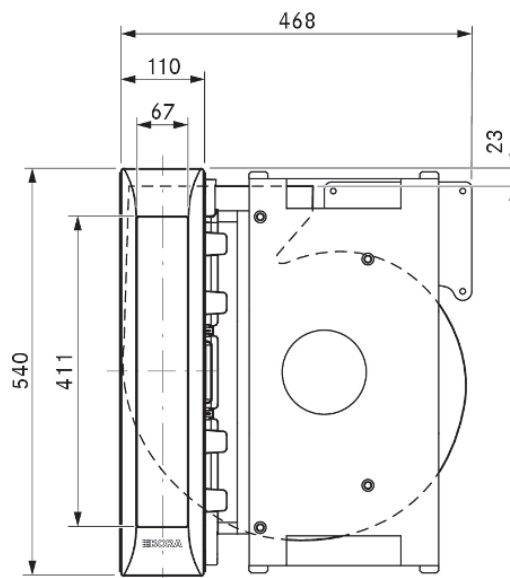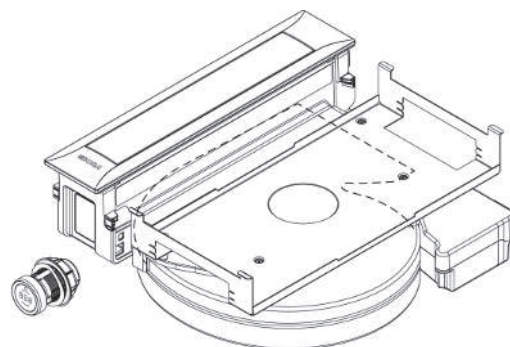

PKC3 / PKC3AB

Pro HiLight cooktop 3-ring/2-ring (...All Black)

Technical data

Supply voltage	380-415 V 2N
Frequency	50-60 Hz
Maximum power consumption	4400 W
Maximum power rating	4400 W
Fuse protection	2 × 16 A
Dimensions (width × depth × height)	370 × 540 × 73 mm
Weight (incl. accessories / packaging)	8.7 kg
Surface material	Glass ceramic
Cooktop power levels	1-9, 2-ring/3-ring additional switching
Heating rings on front cooking zone	3
Heating rings on rear cooking zone	2
Size of front cooking zone	Ø 120/180/235 mm
Size of rear cooking zone	Ø 120/200 mm
Front cooking zone output	800/1600/2500 W
Rear cooking zone output	800/1900 W
Power supply cable length	1.5 m
Cooktop communication cable	1 m
Interface-to-control knob cable	1 m

Product description

- Intuitive control knob
- 2-ring additional switching
- 3-ring additional switching
- Demo mode

Functions

- Cooking zone timer
- Automatic heat-up function
- Variable heat retention function
- Pause function
- Super simple mode

Safety features





Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery

HiLight cooktop 3-ring/2-ring PKC3/PKC3AB, 2 control knobs, 2 control knob connection cables, connection cable to the extractor, operating and installation instructions, installation accessories

Product and planning information

- Rotation by 180° possible during installation – 70 mm clearance required to the rear
- Sufficient ventilation below the cooktop must be ensured
- Can be operated with limited functions without a cooktop extractor
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant

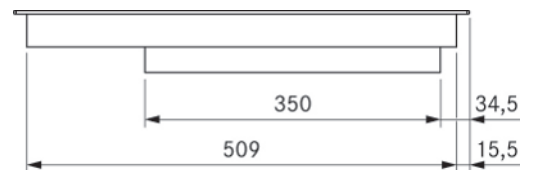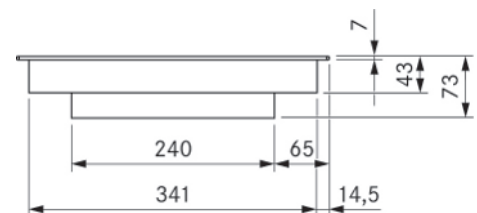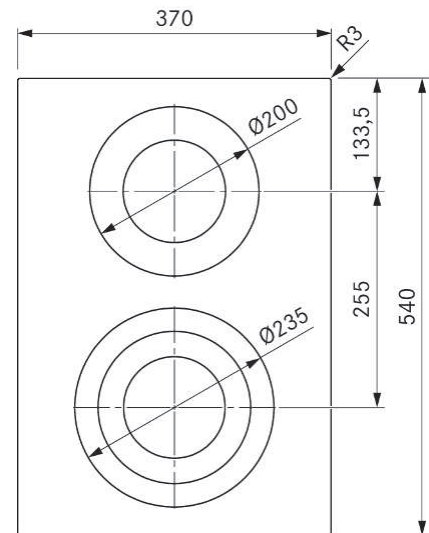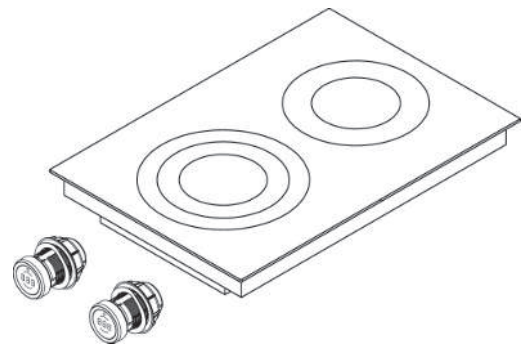

PKCB3 / PKCB3AB

Pro HiLight cooktop 3-ring/roaster (...All Black)

Technical data

Supply voltage	380-415 V 2N
Frequency	50-60 Hz
Maximum power consumption	5100 W
Maximum power rating	5100 W
Fuse protection	2 × 16 A
Dimensions (width × depth × height)	370 × 540 × 73 mm
Weight (incl. accessories / packaging)	8.9 kg
Surface material	Glass ceramic
Cooktop power levels	1-9, 2-ring/3-ring/roaster additional switching
Heating rings on front cooking zone	3
Heating rings on rear cooking zone	2
Size of front cooking zone	Ø 120/180/235 mm
Size of rear cooking zone	Ø 165/290 × 165 mm
Front cooking zone output	800/1600/2500 W
Rear cooking zone output	1500/2600 W
Power supply cable length	1.5 m
Cooktop communication cable	1 m
Interface-to-control knob cable	1 m

Product description

- Intuitive control knob
- 2-ring additional switching
- 3-ring additional switching
- Roaster additional switching
- Demo mode

Functions

- Cooking zone timer
- Automatic heat-up function
- Variable heat retention function
- Pause function
- Super simple mode

Safety features





Child lock, residual heat indicator, overheating protection, safety shut-down

Scope of delivery

HiLight cooktop 3-ring/2-ring/roaster PKCB3/PKCB3AB, 2 control knobs, 2 control knob connection cables, connection cable to the extractor, operating and installation instructions, installation accessories

Product and planning information

- Rotation by 180° possible during installation, 70 mm clearance required to the rear
- Sufficient ventilation below the cooktop must be ensured
- Can be operated with limited functions without a cooktop extractor
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant

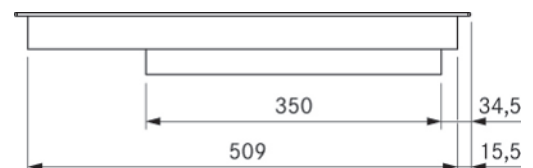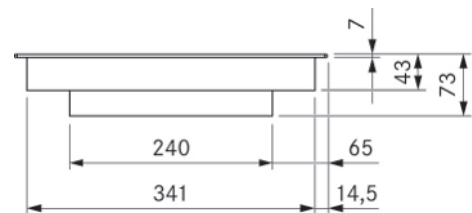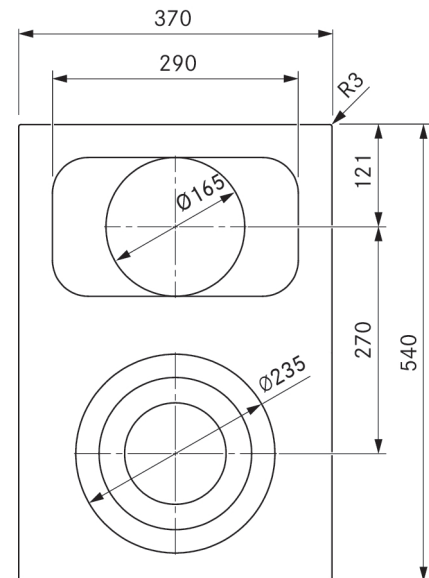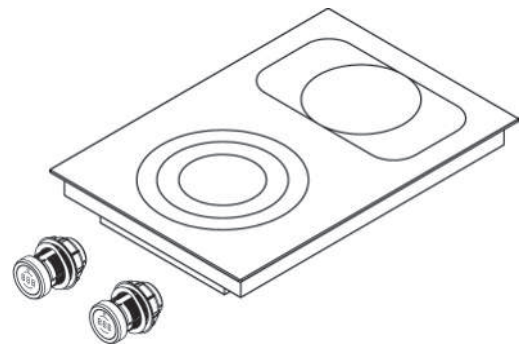

EFBV90/1

Ecotube 90° bend, flat vertical incl. sealing material

Technical data

Dimensions (width × depth × height)	255 × 139 × 139 mm
Weight (net)	0.35 kg
Material properties	Class C according to DIN EN 13501-1

Scope of delivery


2 flat seals EFD

Accessories

- Mounting bracket set EFMS

Product and planning information

- Moulded part with a shallow socket design

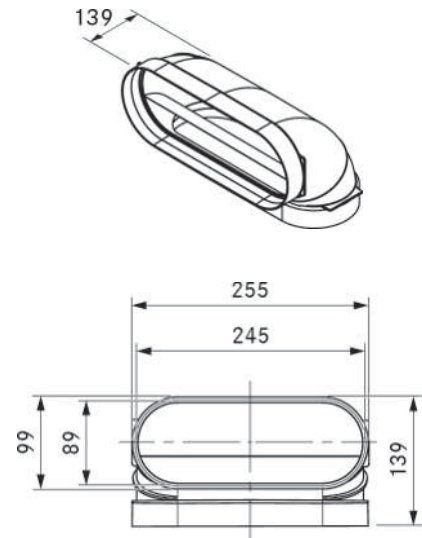


EFS375/1

Ecotube shallow duct with partition 375 mm

Technical data

Dimensions (width × depth × height)	245 × 375 × 89 mm
Weight (net)	0.85 kg
Material properties	Class C according to DIN EN 13501-1

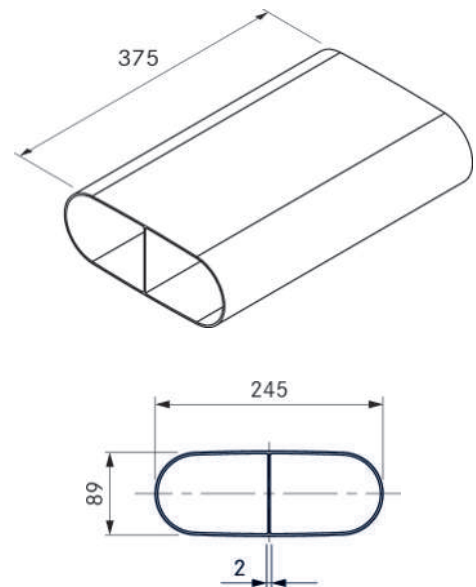

EFV/1

Ecotube duct connection, flat incl. sealing material

Technical data

Dimensions (width × depth × height)	255 × 50 × 99 mm
Weight (net)	0.12 kg
Material properties	Class C according to DIN EN 13501-1

Scope of delivery

2 flat seals EFD

Accessories

Mounting bracket set EFMS

Product and planning information

- Moulded part with two shallow sockets

