

EN PURMA2 / PURMA2R product information sheet


High-gloss glass ceramic:



PURMA2

M Pure combined induction cooktop with integrated cooktop extractor – exhaust air


Matt glass ceramic:

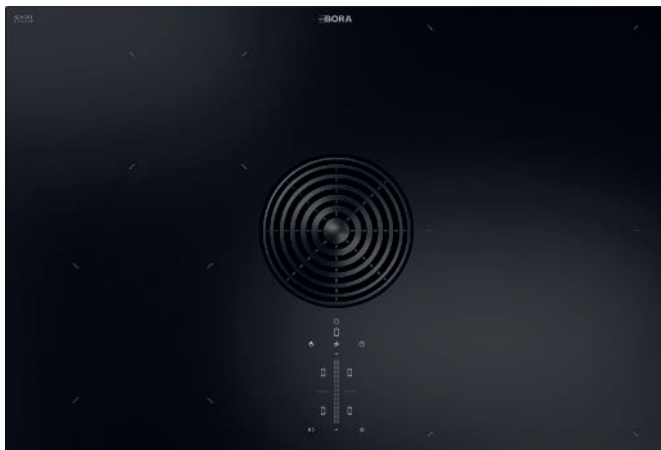

PURMA2R

M Pure Rough combined induction cooktop with integrated cooktop extractor – exhaust air

General product information:

Product:	Compact cooktop extractor system – a combined induction cooktop and extractor in a single appliance
Product highlights:	Induction cooking zones on the left, surface induction cooking zones on the right, intuitive touch controls, BORA Assist for simpler cooking experiences, wider range of functions with the BORA JOY app, filter change from above through the air inlet opening
Model:	Exhaust air system with BORA Ecotube duct connection
Minimum installation dimensions:	Kitchen unit with a min. width of 80 cm
Safety and warning information:	See operating and installation instructions
Energy efficiency class:	

PISPURMA2EN-10001

PURMA2 / PURMA2R

M Pure combined induction cooktop with integrated cooktop extractor – exhaust air

Technical data

Multiphase supply voltage	380–415 V 2N/3N
Single-phase supply voltage	220–240 V
Frequency	50–60 Hz
Maximum power consumption	7360 W (4400 W/3600 W)
3-phase fuse protection/power supply	3 × 16 A
2-phase fuse protection/power supply	2 × 16 A
1-phase fuse protection/power supply	1 × 32 A (1 × 20 A/1 × 16 A)
Dimensions (width × depth × height)	760 × 515 × 199 mm
Weight (incl. accessories / packaging)	21.8 kg
Surface material	Glass ceramic
Cooktop extractor / cooktop power levels	1–9, P
Size of front left cooking zone	Ø 210 mm
Size of rear left cooking zone	Ø 175 mm
Size of right cooking zones	230 × 230 mm
Front left cooking zone output	2300 W
Rear left cooking zone output	1400 W
Right cooking zone output	2100 W
Front left cooking zone output on power setting	3000 W
Rear left cooking zone output on power setting	2100 W
Output of right cooking zones on power setting	3000 W
Duct connection	BORA Ecotube
Guaranteed availability period for software updates (from product discontinuation date)	5 years

Product description

- Connectivity and BORA Assist
- Intuitive tricolour sControl+ operating panel
- Oversized surface induction cooking zones (right)
- Compact size
- Stainless steel grease filter and integrated grease drip tray
- Oversized drip tray (3-litre capacity)

Functions

- BORA Assist function Fry
- Power setting
- Automatic extractor function
- Automatic after-run
- Pan size recognition
- Automatic heat-up function
- Heat retention function
- Bridging function (right)
- Cooking zone timer
- Pause function
- Short-time timer

Safety features

Child lock, control lock, cleaning lock, residual heat indicator, safety shut-down, overheating protection

Scope of delivery

Surface induction/induction cooktop with integrated cooktop extractor – exhaust air PURMA2/ PURMA2R, air inlet nozzle PUED2, stainless steel grease filter, operating and installation instructions, installation accessories

Accessories

Stainless steel grease filter PUEF, air inlet nozzles PUED2 and PUXED2, sealing tape UDB25, cooktop frame KFR760AB, side frame USL515/USL515AB, grill pan for surface induction KWGPFI

Product and planning information

- The mains supply cable is to be provided on site
- Front power socket
- Flush installation or surface mounting possible
- Sufficient ventilation below the cooktop must be ensured
- The drawers or shelves in the base unit must be removable (for maintenance and cleaning)
- Suitable for use with all BORA sockets
- Not compatible with BORA universal fans
- When installation is complete, the appliance is to be sealed in using heat-resistant silicone sealant

