


LSLSW / LSLMG / LSLRG



Stars pendant light 3-light linear – black

Stars pendant light 3-light linear – moss green

Stars pendant light 3-light linear – rose gold

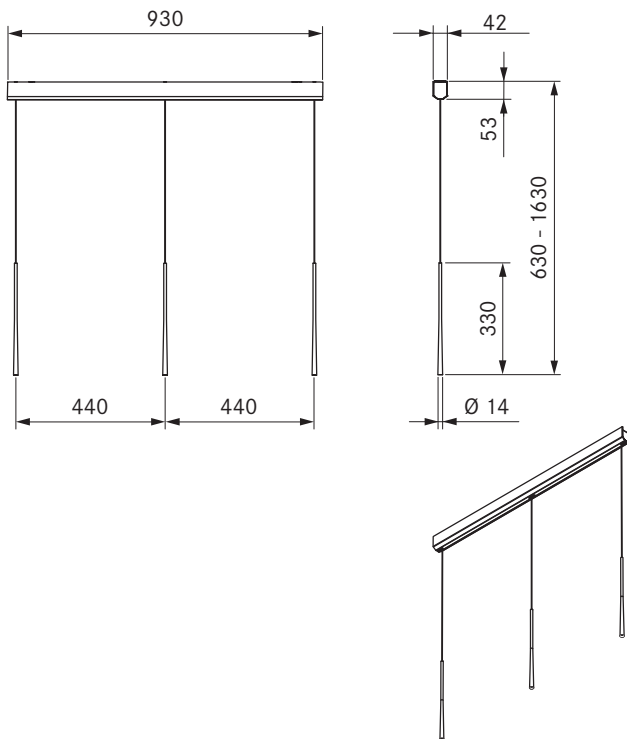

Technical data

Lighting type	Pendant light
Supply voltage	220 - 240 V
Frequency	50 - 60 Hz
Maximum power consumption	10,5 W
Connection clamp	3 pole
Lighting control system	Pushbutton / DALI
Dimmable	Yes
Bulb	LED
Light colour	warm white
Colour temperature	2700 K
Colour rendering index (Ra)	CRI > 90
Lux	690 lm
Direct beam angle	46°
Service life	> 50000 h
Switching cycles	min. 50000
Surface material	Metal / Plastic
Protection class	1
Protection rating	IP 20
Ceiling housing dimensions (W x D x H)	930 x 42 x 53 mm
Light dimensions (D x H)	14 x 330 mm
Weight (incl. accessories/packaging)	4,2 kg
Power consumption in standby mode	< 0.5 W

Product description

- Height-adjustable without tools
- DALI-controlled

Scope of delivery

- Stars pendant light 3-light linear
- Operating and installation instructions
- Drilling template

Product- and planning instructions

- Fixing elements must be provided at the installation site