


# PKFI11




BORA Pro surface induction glass ceramic cooktop with 2 cooking zones







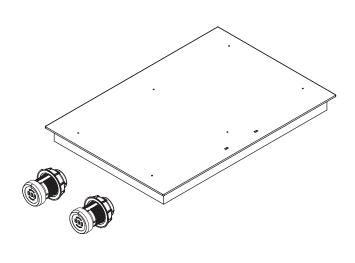

## technical data

Supply voltage	220 - 240 V
Frequency	50/60 Hz
Maximum power consumption	3.7 kW
Maximum power rating	3.7 kW
Minimum fuse protection	1 x 16 A
Power supply cable length	1,5 m
Dimensions (WxDxH)	370 x 540 x 52 mm
Weight (incl. accessories/packaging)	8.1 kg
Surface material	SCHOTT CERAN®
Cooktop power levels	1 - 9, P
Size of front cooking zone	230 x 230 mm
Size of rear cooking zone	230 x 230 mm
Front cooking zone output	2100 W
Rear cooking zone output	2100 W
Front cooking zone power setting output	3700 W
Rear cooking zone power setting output	3700 W

### **Product description**

- · Intelligent control knob
- Oversized 4 24 cooking surface
  Oversized surface induction cooking zones
- Performance level display on the cooktop
- Variable heat retention function
- childproofing feature
  bridging function
  Cooking zone timers
- Timer
- Demo mode

- Scope of delivery
   PKFI11 surface induction glass ceramic cooktop
- 2 x control knobs
- 2 x connection cables for the control knobs
- Connection cable to the extractor
- operating and installation instructions
- mounting strapsglass ceramic scraper
- height adjustment plate set

- product- and planning instructions
  Rotation by 180° possible during installation
  Please note that induction-compatible cookware must be used on induction cooktops
- Ensure sufficient ventilation of the area below the cooktop.